


MAIN FEATURES AND BENEFITS:


- Pump Casing and Front Cover Coated In Tefzel® Totally Anticorrosive.
- Drainage System to Avoid Any Accumulation of Corrosive Products inside the Pump Casing.
- Hose Leakage sensor to stop the pump immediately in case of leakage.
- Plastic connections in Polypropylene or PVDF.

TMVT C12 | C17 | C21


TECHNICAL SPECIFICATIONS	MODEL C12
Max. Flow (continuous)	180 l/h
Capacity	0,037 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	13 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

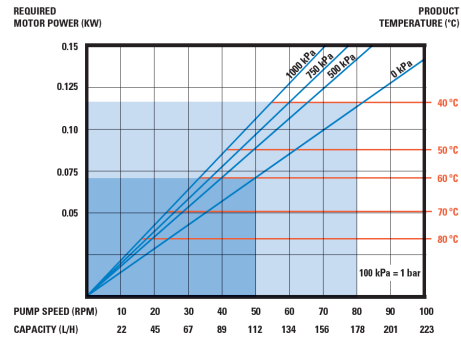

TECHNICAL SPECIFICATIONS	MODEL C17
Max. Flow (continuous)	450 l/h
Capacity	0,094 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	16 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

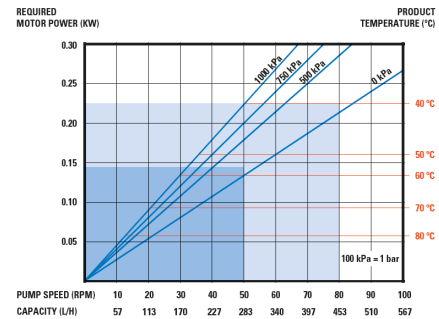


TECHNICAL SPECIFICATIONS	MODEL C21
Max. Flow (continuous)	1200 l/h
Capacity	0,246 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	22 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

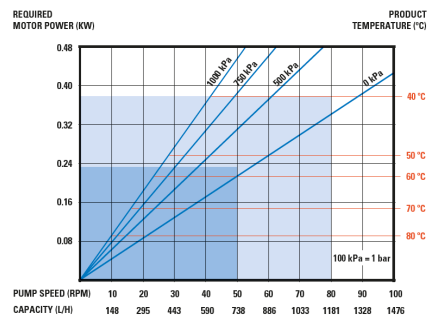


TMVT C28 | C35

TECHNICAL SPECIFICATIONS	MODEL C28
Max. Flow (continuous)	1600 l/h
Capacity	0,376 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	28 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

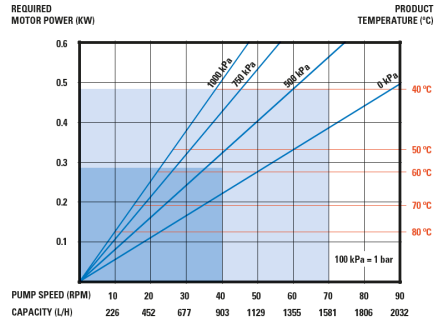


TECHNICAL SPECIFICATIONS	MODEL C35
Max. Flow (continuous)	3200 l/h
Capacity	0,748 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	35 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

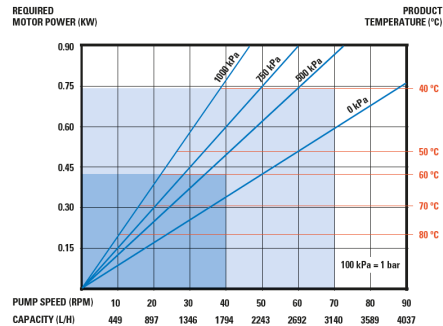

TMVT C43 | C55

TECHNICAL SPECIFICATIONS	MODEL C43
Max. Flow (continuous)	6500 l/h
Capacity	1,537 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	43 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

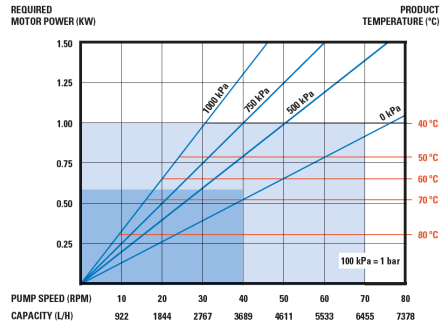

TECHNICAL SPECIFICATIONS	MODEL C55
Max. Flow (continuous)	13000 l/h
Capacity	3,533 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °c
Inner Diameter	55 mm.
Hose material	NR, EPDM
Connections	AISI-316, PP, PVDF (PTFE)
Pump casing material	Aluminium Tefzel® coating

